

Savinfax 3725e

> PLAIN PAPER FAX SYSTEM

Compact,
Versatile,
Reliable



Savinfax 3725e



Savin®

Business Performance That Fits On T

With the **Savinfax 3725e**, the competitive edge belongs to you.

The 3725e streamlines workflow and communications with many advanced, highly productive features. Ultra-fast transmission speed, sophisticated fax functions, versatile paper-handling capabilities and optional network printing combine to meet the needs of even the most demanding work-groups – including yours.



Smarter and Faster? You Bet!

With the Savinfax 3725e, you'll be off to a running start...right out of the box.

- No time to read a lengthy Operator's Manual? No problem! Just turn the 3725e on, and easy-to-follow instructions instantly appear on the Control Panel – making installation and configuration a breeze.
- Don't worry about tight deadlines! A standard 33.6 Kbps Super G3 modem combines with super-efficient JBIG Compression, which enables your 3725e to speed critical documents to their destinations in just 3 seconds per page.
- Never lose an important fax. The 3725e has a standard 6 MB (480 pages) memory capacity, and with the optional 40 MB Memory Card you can store up



to 1,500 pages. And, if there's ever an interruption to the power supply, the 3725e's Memory Battery Backup protects stored documents from being lost.

- With Memory Transmission, documents do not have to be left on the 3725e when the unit is busy. Just scan documents into memory and transmission will occur once the phone line is available. Parallel Memory Transmission also speeds your documents on their way by dialing and beginning transmission right after the first page has been scanned.
- Manage two jobs simultaneously using the 3725e's Dual Access function. Scan outgoing messages into memory while printing received documents – it's almost like having two fax machines in one.

- Auto Document stores frequently transmitted documents into memory for use whenever needed. This eliminates searching for documents and ensures that the document being sent is clean.
- Stack and go! The 3725e automatically processes – and scans – up to 50 original sheets, which means you get back to more pressing jobs faster.
- Load up to 850 sheets* of paper – including 8.5" x 14" – at a given time and reduce paper replenishment tasks... a real plus during peak operating times.
- Energy Saver Mode will save you money when the 3725e is idle, consuming only 1.2 watts** or less of electricity. The 3725e is fully Energy Star-compliant.



*With optional Paper Feed Unit.


**Without options.

he Desktop.

Easy to use Control Panel clearly guides you through any function.

Five Programmable User Function Keys –

Quickly and easily access the features you use most with one touch of a button.

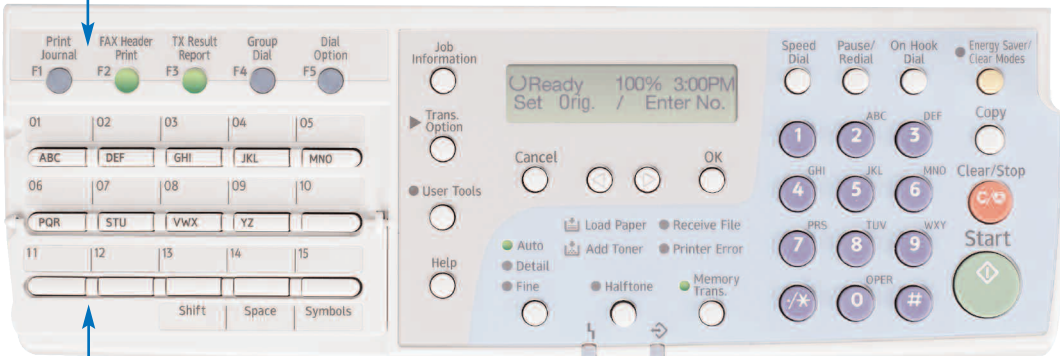

Quick Dial Keys – Up to 30 fax numbers can be stored in the the Savinfax 3725e, then instantly transmitted to in one step.

Status Indicator Lights provide easy-to-see operational information on the system that can be viewed from a distance. A green light means a transmission or reception is in progress. A red light means that toner or paper is needed, or there is a communication error.

Need Another Printer? No Problem!

Just add the optional Print Controller and Network Interface Board and your 3725e doubles as a 15 ppm network printer. Standard PCL5e/6 and optional PostScript 2 emulation provide compatibility for PC and Macintosh users, while 600 dpi laser quality resolution ensures that every document looks its best.

SmartNetMonitor Management Utility

Manage your networked 3725e with SmartNetMonitor. Comprehensive software provides real-time information – system configuration, system status and paper supplies – to users and network administrators.

Security PIN Code Protection

To prevent exposure of a PIN Code or Personal ID, any character after a certain position in the destination's dial number will be concealed both in the display and Communications Report.

Looking for a Sure Thing? You Just Found It!

The Savinfax 3725e can handle anything your busy workgroup can throw its way. If you're not convinced, just contact your authorized Savin sales location to see the 3725e in action... we'll change your mind.

For more information contact your authorized Savin dealer.



Print on labels, transparencies, postcards and special stocks through the built-in bypass feed.



The standard 250-sheet frontloading paper tray and 100-sheet Bypass Tray can be supplemented with an optional 500-sheet tray for a total capacity of 850 sheets.



Quickly scan documents with the 50-page Automatic Document Feeder.

Savinfax 3725e

Savinfax 3725e

- > Super G3 Fax
- > Large Memory Capacity
- > Huge Paper Supply
- > Optional Network Printing

SPECIFICATIONS

Type	Desktop Facsimile
Recording Method	Laser
ITU-T Compatibility	Group 3 (V.34); ECM
Modem Speed	33.6 Kbps with Auto Fallback
Maximum Transmit Speed	3 seconds ¹
Data Compression	MH/MR/MMR/JBIG
Scan Speed	2.8 seconds ²
(standard resolution)	
Dual Access	Standard
Standard Document Memory	6 MB (480 pages ²)
Optional Document Memory	40 MB (1,500 pages ²)
AutoDialer	30 Quick Dials, 100 Speed Dials, 5 Groups 5 Dedicated Keys
User Function Keys	
Document Memory Backup	12 Hour (standard memory)
Auto Document Feed Capacity	50 Sheets
Maximum Document Width/ Scan Width	8.5" / 8.4"
Document Length	23.7"
Scan Resolution	Standard: 200 x 100 dpi Detail: 200 x 200 dpi Fine: 200 x 400 dpi
Halftone	64 Shades of gray with Error Diffusion
Maximum Print Speed	15 pages per minute
Maximum Print Resolution	600 dpi
Resolution Enhancement	Super Smoothing HQ™
Maximum Recording Width	8.4"
Maximum Recording Paper Size	8.5" x 14"
Standard Paper Capacity	250-Sheet Cassette tray 100-Sheet Bypass tray
Optional Paper Capacity	500-Sheet
LCD Display Size	2 Lines (22 Characters)
Power Consumption	
Energy Saver Mode	1.2W and lower (without options)
Power Requirements	115 VAC, 60Hz
Environment	59° to 77°F, 30 to 70% RH
Dimensions (WxDxH)	17.6" x 19.5" x 16.2" (without options)
Weight	40.8 lbs. (without options)
Optional PFU	
Dimensions (WxDxH)	17.0" x 16.1" x 5.5"
Weight	10.6 lbs.

GENERAL FEATURES

Auto Collation
Auto Document
Auto Document Feeder
Auto Start Initial Setup
Clock with Auto Daylight Savings Time
Direct Fax Number Entry
Dual Access
Energy Saver Mode
Fax Number Entry Before Loading Document
File List
Group Dial
Group Dial List Report
Halftone with Error Diffusion
Help On Demand
Keystroke Programs
Label Registration for Quick/Speed Dials
LCD Prompts

GENERAL FEATURES (Cont.)

Memory Storage Report
Ozone Emission-Free
Personal Codes and Code List Report
PIN Code Security
Print Quick Dial Labels
Program List Report
Quick Dial Keys and Quick Dial List Report
Remaining Memory Indicator
Resolution Control
Restricted Access
Scanner Cleaning Notification
Specified Cassette Selection List Report
Speed Dial Codes and Speed Dial List Report
Telephone Connection
Telephone Directory
Usage Counter
User Function List Report
User Parameter List Report
Wild Cards

COMMUNICATION FEATURES

Answering Machine Interface
Automatic Fax/Tel Change
AI Redial
Busy Tone Detection
Chain Dialing
Communication Failure Report
Distinctive Ring Detection
Error Correction Mode
Error Report
Monitor Speaker
On Hook Dialing
Power Failure Report
Pulse/Tone Selection
Redial (Auto/Manual)
Shortened Protocol

TRANSMISSION FEATURES

Batch Transmission
Blank Document Detection
Closed Network
Confidential Transmission with ID
Fax Header (TTI)
Forwarding
Immediate or Memory Transmission
Label Insertion
Memory Transmission Immediate Stop
Memory Transmission Result Report
Page Count
Page Retransmission
Quick (Parallel) Memory Transmission
Send Later
Serial Broadcasting (Immediate and Later)
Transmission Confirmation Report
Transmission Result Report

RECEPTION FEATURES

Authorized Reception
Auto or Manual Reception
Closed Network
Confidential Reception with ID
Confidential Reception Report

RECEPTION FEATURES (Cont.)

Continuous Polling
Document Separation Mark (Checked)
Memory Lock (All or By Address)
Multi-Polling Reception
Page Separation & Length Reduction
Poll Later
Polling Reception (With and Without ID)
Reception Mode Selection (Auto/Manual)
Reception Time Printing
Specified Cassette Selection
Substitute Reception

COPY FEATURES

Copy up to 99 copies
Copy at 15 pages per minute

PRINTER FEATURES

15 ppm at 600 dpi With Edge Smoothing
Bi-Directional Parallel Port
Collated Printing
Font Download
Network Connectable (requires opt. NIB) (Ethernet)
Network OS
- Novell NetWare 3.x, 4.x, and 5.x
- MS Windows NT 4.0/2000
- MS Windows 95/98/Me/XP
- Mac OS 8.x, 9.x, and X
(Mac OS X (Classic) is supported)
PCL5e/6 Compatibility
- MS Windows 95/98/Me/XP
- MS Windows NT 4.0/2000
PostScript 2 Compatibility (optional)
- MS Windows 95/98/Me/XP
- MS Windows NT 4.0/2000
- Macintosh Driver
Printer Driver Features
- Custom Paper Size
- Layout
- Page Protect
- Page Order³
- Paper Selection
- Slip Sheet³
- Toner Saver
- User ID
- User Code
- Watermarks
Resident Fonts
- PCL Fonts = 10 TrueType / 35 Intellifonts
- PS Fonts = 80 (Only available with PS2 option)
10/100 Base-T Network Interface Board (optional)

OPTIONS

Feature (Memory) Expander Card Type 300 (40MB)
(non volatile)
Printer Interface Type 1013 (see Printer Features)
Telephone Handset Type 1018
Type 1018 PS2 Compatible Kit
10/100 Base-T Network Interface Board Type 1018
32 MB/64 MB/128 MB Printer Memory
500-Sheet Paper Cassette

1 Approximately 3 seconds per page at 33.6 Kbps is dependent on optimal line quality, and customer performance may vary by location. Current systems used by the Public Switched Telephone Network (PSTN) generally support 28.8 Kbps modem speeds or lower.

2 Based on ITU-T Test Chart #1 in standard resolution.

3 Not available for PS2/Macintosh

Savin

Savin Corporation Stamford, Connecticut 06904 ©2005 Savin Corporation.

SAVIN® is a registered trademark of Savin Corporation. All other trademarks are the property of their respective owners.

Product specifications subject to change without notice.

♻️ Printed in U.S.A. on recycled paper. (S2048) 35M 2/05

