

SAVIN®

SP C210SF

Desktop Color Laser MFP


PRINT >

CONNECT >

COPY >

SPEED >

PERFORM >

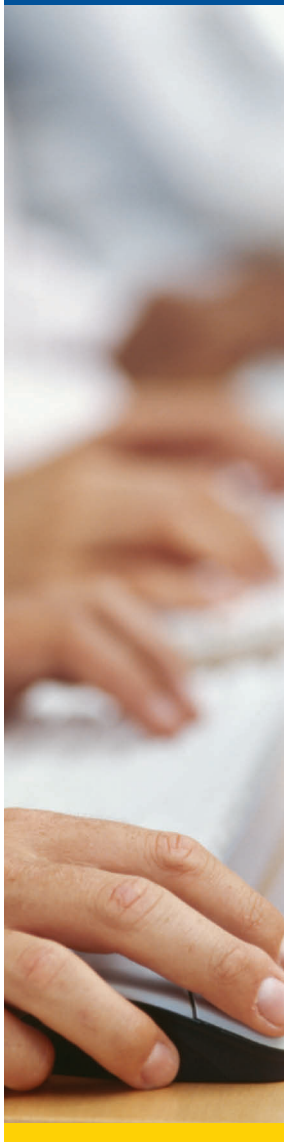

**Do more from
your desktop.**

MAIN UNIT

Configuration: Desktop Color Laser MFP
 Technology: Laser Beam Scanning & Electro-photographic Printing; Single Component Toner Development

Output Speed (Letter)
 Printing: Color: 8 ppm, Monochrome: 31 ppm
 Copying (ADF): Color: 7 cpm, Monochrome: 21 cpm
 Multiple Copying: 1 to 99
 Warm-up Time: 45 seconds or less
 First Print Time: Color: < 20 seconds, Monochrome: < 14 seconds

First Copy Time: Color: < 30 seconds, Monochrome: < 20 seconds

Scan/Copy Resolution: 600 x 600 dpi / 600 x 300 dpi
 Original Type: Sheets, Books, 3D objects
 Document Feeding: Standard 35-sheet ADF
 Output Size: 5.5" x 8.5" to 8.5" x 14"*, Envelopes *with optional legal tray

Standard Paper Capacity: 250 x 1
 Optional Paper Supplies: 530 x 1 (Letter Tray) or 250 x 1 (Legal Tray)

Maximum Paper Capacity: 780 sheets

Acceptable Paper Sizes: Standard Tray: Letter (8.5" x 11") A4 (8.3" x 11.7") EXE (7.25" x 10.5") B5 (6.9" x 9.8")
 Optional Paper Tray: Letter (8.5" x 11") A4 (8.3" x 11.7") EXE (7.25" x 10.5") B5 (6.9" x 9.8")
 Optional Legal Tray: Legal (8.5" x 14") A5 (5.8" x 8.3") HLT (5.5" x 8.5")

Envelopes Via Standard Tray Only: Com10, C5, DL

Acceptable Paper Weights: Standard Tray: 16 lb. – 55 lb. Bond/110 lb. Index (60 – 210 gm²)
 Optional Letter Tray: 16 lb. – 28 lb. Bond (60 – 105 gm²)
 Optional Legal Tray: 16 lb. – 55 lb. Bond/110 lb. Index (60 – 210 gm²)

Acceptable Paper Types: Plain paper, thick paper, transparencies, labels, glossy, envelopes

Duplex: Manual
 Output Tray Capacity: 250 sheets face down
 Zoom: 25% - 400% in 1% increments
 Reduction Ratios: 50%, 70%, 78%, 83%, 85%, 91%, 94%, 97%
 Enlargement Ratios: 104%, 141%, 200%
 Power Source: 120V, 60Hz
 Power Consumption: Printing: 615W
 Dimensions (WxHxD): 19" x 17.4" x 21" (482mm x 437mm x 534mm)
 Weight: Approximately 76.7 lb. (34.8kg)

PRINT CONTROLLER (STANDARD)

CPU: VR5500A @ 266MHz (shared)
 Memory: 64MB RAM standard, 576MB RAM maximum

Page Description Languages: Windows/Mac
 Print Resolution: Normal Mode: 600 x 600 dpi
 Fine Mode: 2400 dpi level

Standard Interfaces: IEEE 1284 Parallel, USB 2.0, 10/100Base-TX Ethernet
 Network Protocols: TCP/IP, IPX/SPX, SMB

Print Drivers/Operating Systems: Windows® 9x/Me/NT4.0/2000/XP
 Macintosh OS 9.1 – 9.2, OS X 10.2.4 or later

Utilities: SmartDeviceMonitor for Admin/Client, Web Image Monitor

SCANNER (STANDARD)

Scanning Modes: Full-color and 256-level grayscale
 TWAIN scanning

Scanning Resolution: Via Platen: Up to 1200 x 2400 dpi (optical)
 Via ADF: Up to 1200 x 600 dpi (optical)
 Maximum 9600 x 9600 dpi (interpolated)

Scanning Speed: Monochrome: 21 originals per minute
 Full-color: 7 originals per minute

Scan Area: Via Platen: Up to 8.5" x 11.7"
 Via ADF: Width: 5.8" – 8.5", Length: 5.8" – 14"

Scanner Utilities & Drivers: TWAIN Driver, Control Center Scanner Utility, OmniPage OCR, PaperPort 9.0SE
 Image Viewer

Protocol Support: TCP/IP, IPX/SPX, SMB

FACSIMILE (STANDARD)

Type: Super G3 Transceiver
 Circuit: PSTN, PBX
 Number of Lines: 1
 Compatibility: ITU-T Group 3
 Resolution: 203 x 98 Standard Mode
 203 x 192 Fine Mode
 203 x 392 Superfine Mode

Modem Speed: 33.6 Kbps with Automatic Fallback to 2,400 bps

Transmission Speed**,***: G3: 3 seconds per page (without JBIG compression)

Compression Method: MH/MR/MMR/JBIG
 Document Size: Via Platen: Up to 11.7" in length
 Via ADF: Width: 5.8" – 8.5", Length: 5.8" – 14"

Maximum Scanning Width: 8.2" (208mm)
 Scanning Speed: 21 pages per minute
 SAF Memory: Up to 400 pages
 One-touch Dials: 16
 Speed Dial Locations: 200
 Auto Redial: 1 time after 5 minutes
 Auto Answer: At 0, 1, 2, 3 or 4 rings
 PC Faxing: Yes

*Based on ITU-T Test Chart #1 in Standard mode.
 **Approximately 3 seconds per page at 33.6 Kbps is dependent on optimal line quality. Customer performance may vary by location.

HARDWARE ACCESSORIES

530-sheet Paper Tray
 250-sheet Legal Paper Tray
 64MB Memory Unit Type C
 128MB Memory Unit Type C
 256MB Memory Unit Type C

CONSUMABLES & YIELDS

Black Toner Cartridge: 9,800 prints @ 5% coverage
 Cyan Toner Cartridge: 6,500 prints @ 5% coverage
 Magenta Toner Cartridge: 6,500 prints @ 5% coverage
 Yellow Toner Cartridge: 6,500 prints @ 5% coverage
 Photoconductor: 60,000 developments
 Waste Toner Bottle: 11,000 developments

The SP C210SF ships with starter toner cartridges with yields of 5,000 pages for Black and 3,000 pages for Cyan, Magenta, and Yellow colors at 5% coverage.

Specifications subject to change without notice.



The Savin SP C210SF shown here with the optional 530-sheet paper tray.